


SWPPP Binder Insert - Curb & Grate Inlet Protection

ERTEC Combo Guard™

425 micron integrated particle filter – set 2 inches high to allow high-flow bypass

HDPE high-flow outer jackets - 8,000 openings per yd²

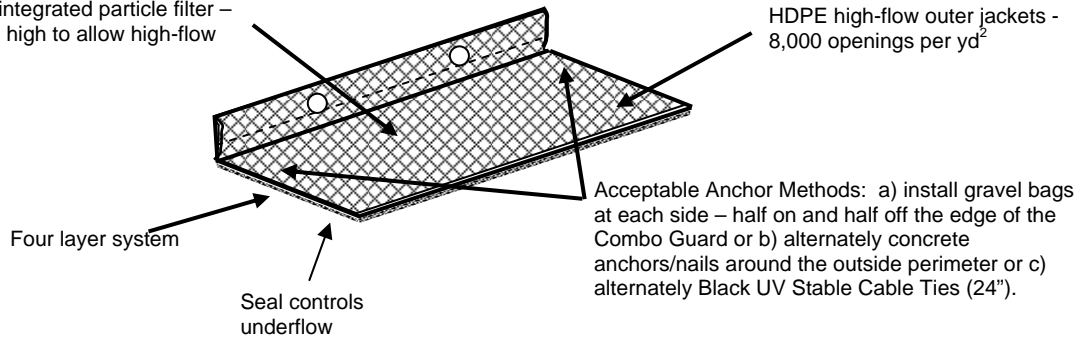

Product Designation	Grate Size
CG 28x22	Fits 23" by 19" Grate
CG 58x22	Fits 36" x 18" and 36" x 20" and 40" x 17" Grates
CG 48x27	Fits 40" x 24" Grate
CG 58x30	Fits 42" x 28" Grate
Custom sizes available upon request	

Definition – ERTEC Combo Guard

A temporary sediment filter made of high density polyethylene with an integrated filter. During construction, place device over the grate and curb opening of the drain inlet near disturbed soil. Anchor with 2 Gravel Bags, or alternately 2 ERTEC GR-8 Hooks™ or alternately concrete anchors/nails or alternately black UV stable cable ties (24 to 36").

Purpose

Storm drain inlet protection is used to intercept sediment laden water at the curb and grate opening and prevent the sediment, associated pollutants and debris from entering the storm water underground pipe systems. The system reduces water velocity which causes heavier soil particles to be deposited above ground. While allowing flow through the module, the barrier filters certain smaller sized particles from suspension and prevents them from flowing through the device and into the pipes. Heavy flows are passed over the top of the filter. Advantages are that it is effective, durable, re-usable, easily installed and cleaned.

Conditions Where the Practice Applies

It is recommended for use over curb & grate openings with small drainage areas. Generally, the drainage areas should be less than 1/3 acre and the total for inlets in series should be 1 acre or less with slopes flatter than 5 percent in the contributing drainage area.

Design Criteria

- Geo-textile Filter: Apparent Opening Size (AOS) = 425 micron integrated particle filter. Flow rate (ASTM D-4491) = 145 gpm/ft². Provide a bypass over the top.
- Outer Jacket Material: HDPE. For detailed characteristics contact ERTEC. Module weight = 3 to 5 lbs. Module height = 6.0". Module length/opening size protected varies as per the chart above – according to grate size. Service temperature (deg F) = -30 to 160.
- Install system with the vertical section covering the curb inlet and the horizontal section covering the grate. Alternate anchor methods listed above. If using Gravel Bags - place small gravel bags containing clean, pea-sized graded gravel on each end of the cover and butt the bags tightly against the curb to keep water in the gutter from flowing behind the filter (do not use sandbags). The porosity of the gravel bag should allow for design flow rate through the bag. The bag should be durable enough to last the period of intended use. If the storm inlet opening exceeds 5.0' in length, overlap one module by 6" over side of adjoining module for a continuous run until the desired length is achieved. Anchor thru the overlap as necessary.

Maintenance

Perform maintenance as required. Inspect following rainfall events and at least daily during prolonged rainfall. Maintain to provide an adequate sediment holding capacity. Debris shall be removed daily and sediment shall be removed when the sediment accumulation reaches 2 inches. Removed sediment shall be incorporated in the project at designated locations or disposed-of outside the project or in conformance with requirements. Remove the device after final stabilization has been achieved.



Combo Guard™

© 2009 ERTEC Environmental Systems
www.ertecsystems.com
 Toll Free: 866-521-0724